



Foxboro™ DCS

FBM239, Discrete 16DI/16DO Module

PSS 41H-2S239

Product Specification

August 2019



Legal Information

The Schneider Electric brand and any trademarks of Schneider Electric SE and its subsidiaries referred to in this guide are the property of Schneider Electric SE or its subsidiaries. All other brands may be trademarks of their respective owners.

This guide and its content are protected under applicable copyright laws and furnished for informational use only. No part of this guide may be reproduced or transmitted in any form or by any means (electronic, mechanical, photocopying, recording, or otherwise), for any purpose, without the prior written permission of Schneider Electric.

Schneider Electric does not grant any right or license for commercial use of the guide or its content, except for a non-exclusive and personal license to consult it on an "as is" basis. Schneider Electric products and equipment should be installed, operated, serviced, and maintained only by qualified personnel.

As standards, specifications, and designs change from time to time, information contained in this guide may be subject to change without notice.

To the extent permitted by applicable law, no responsibility or liability is assumed by Schneider Electric and its subsidiaries for any errors or omissions in the informational content of this material or consequences arising out of or resulting from the use of the information contained herein.

Overview

The FBM239 contains 16 discrete input and 16 discrete output channels that are compatible with voltages and currents commonly found in industrial plants. An external power supply is used to energize the field circuits.

The FBM239 Discrete 16DI/16DO Module provides 16 digital inputs with 16 digital output channels. Associated Termination Assemblies (TAs) and Termination Assembly Adapters (TAAs) provide for discrete nominal inputs of 30 V dc, 60 V dc, 120 V ac/125 V dc, or 240 V ac and nominal outputs of 60 V dc, 120 V ac/125 V dc, or 240 V ac. The module performs signal conversion required to interface the electrical input signals from the field sensors to the Module Fieldbus.

Depending on the type of I/O signal required, the TAs or TAAs support current limiting devices, high voltage attenuation circuits, optical isolation, and external power source connections.

When connected to the appropriate Termination Assembly Adapters (TAAs) or TAs, the FBM239 module provides functionality formerly provided by the 100 Series Fieldbus Module (FBM) I/O subsystem. TAAs and TAs are available which support the functionality of the main FBM09, FBM10, FBM11, FBM26 and FBM41 (8 input/8 output main FBMs). These main FBMs may be used with expansion FBM14, FBM15, FBM16, FBM27, or FBM42 (8 input/8 output expansion FBMs).

Features

- 16 digital input channels, used for either contact sensing, or dc voltage monitoring
- 16 digital output channels, used for either dc output switching with an external source (e.g. to control powering of various external loads), or dc output switching with an internal source only (e.g. to power external solid state relays or other similar devices)
- Rugged design suitable for enclosure in Class G3 (harsh) environments
- Supports discrete input signals at voltages of:
 - 30 V dc/60 V dc
 - 120 V ac/125 V dc
 - 240 V ac
- Supports output switching at voltages of:
 - 60 V dc
 - 120 V ac/125 V dc
 - 240 V ac
- Executes the programs for Digital I/O (ECB5), and Ladder Logic (ECB8)
- Various TAs provide for per-channel isolation and 100 Series I/O upgrade, and contain:
 - High voltage attenuation and optical isolation for inputs
 - External power connection for device excitation
 - Output current limiting

Standard Design

FBM239 has a rugged extruded aluminum exterior for physical protection of the circuits. Enclosures specially designed for mounting the FBMs provide various levels of environmental protection, up to harsh environments, per ISA Standard S71.04.

Visual Indicators

Light-emitting diodes (LEDs) incorporated into the front of the module provide visual indication of the FBM operational status, as well as the discrete states of the individual input/output points.

Easy Removal/Replacement

The module can be removed/replaced without removing field device termination cabling, power, or communication cabling.

Fieldbus Communication

A Fieldbus Communications Module or a Control Processor interfaces to the 2 Mbps module Fieldbus used by the FBMs. The FBM239 accepts communication from either path (A or B) of the 2 Mbps Fieldbus. If one path is unsuccessful or is switched at the system level, the module continues communication over the active path.

Modular Baseplate Mounting

The module mounts on a DIN rail mounted baseplate, which accommodates up to four or eight FBMs. The Modular baseplate is either DIN rail mounted or rack mounted, and includes signal connectors for redundant Fieldbus, redundant independent DC power, and termination cables.

Field I/O Signals

Field I/O signals connect to the FBM subsystem via DIN rail mounted TAs or TAAs mounted on the conversion mounting structures. TAAs are discussed in *Termination Assembly Adapter Modules for 100 Series Upgrade* (PSS 41H-2W4). The TAs used with the FBM239 are described in *Termination Assemblies And Cables*, page 11.

Functional Specifications

Input/Output Channels	16 group isolated digital input channels and 16 group isolated digital output channels
Filter/Debounce Time	Configurable (No Filtering, 4, 8, 16, or 32 ms)
Voltage Monitor (FBM239 with feed through TA RH924VJ (supersedes P0924VJ))	<ul style="list-style-type: none"> • Input: 30 V dc maximum applied voltage • On-State Voltage: 15 to 30 V dc • Off-State Voltage: 0 to 5 V dc • Current Input for On-State: 2.3 mA maximum at 30 V dc • Source Resistance Limits: <ul style="list-style-type: none"> ◦ On-State: 1 kΩ (maximum) at 15 V dc ◦ Off-State: 100 kΩ (minimum) at 30 V dc
Contact Sense (FBM239 with feed through TA RH924VM (supersedes P0924VM))	<ul style="list-style-type: none"> • Contact Supply: 24 V dc nominal (supplied by FBM through the TA) • Contact Current: 1.8 mA dc nominal • Source Resistance Limits: <ul style="list-style-type: none"> ◦ On-State: 1 kΩ (maximum) at 15 V dc ◦ Off-State: 100 kΩ (minimum) at 30 V dc
Output (FBM239 with feed through TAs RH924VJ (supersedes P0924VJ) or RH924VM (supersedes P0924VM))	<ul style="list-style-type: none"> • Applied Voltage (External): 60 V dc (maximum) • Load Current: 0.24 A dc maximum per channel 2.0 A dc maximum per TA • Inductive Loads: Outputs may require a protective diode or MOV connected across the load

Isolation	<p>Input and output channels are group isolated from each other and earth (ground). For details, refer to the <i>Standard and Compact 200 Series Subsystem User's Guide</i> (B0400FA). The module/TA withstands, without damage, a potential of 600 V ac applied for one minute between the group isolated channels or between either set of group isolated channels and ground.</p> <div style="background-color: black; color: white; text-align: center; padding: 5px;">⚡⚠ DANGER</div> <div style="background-color: #f0f0f0; padding: 5px;">HAZARD OF ELECTRIC SHOCK, EXPLOSION, OR ARC FLASH</div> <p>This does not imply that these channels are intended for permanent connection to voltages of these levels. Exceeding the limits for input voltages, as stated elsewhere in this specification, violates electrical safety codes and may expose users to electric shock.</p> <p>Failure to follow these instructions will result in death or serious injury.</p>
Communication	Communicates with its associated FCM or FCP via the module Fieldbus
Power Requirements	<ul style="list-style-type: none"> • Input Voltage Range: 24 V dc +5%, -10% • Module Consumption: 2.65 W (maximum) at 24 V dc • Module Heat Dissipation (including contribution from field power supply): 5.3 W (maximum) at 2 A total load and all inputs at 30 V dc
Calibration Requirements	Calibration of the module is not required.
Regulatory Compliance: Electromagnetic Compatibility (EMC)	<ul style="list-style-type: none"> • <i>European EMC Directive 2004/108/EC:</i> Meets: EN61326-1:2013 Class A Emissions and Industrial Immunity Levels • <i>CISPR 11, Industrial Scientific and Medical (ISM) Radio-frequency Equipment - Electromagnetic Disturbance Characteristics - Limits and Methods of Measurement:</i> Meets Class A Limits • <i>IEC 61000-4-2 ESD Immunity:</i> Contact 4 kV, air 8 kV • <i>IEC 61000-4-3 Radiated Field Immunity:</i> 10 V/m at 80 to 1000 MHz • <i>IEC 61000-4-4 Electrical Fast Transient/Burst Immunity:</i> 2 kV on I/O, V DC power and communication lines • <i>IEC 61000-4-5 Surge Immunity:</i> 2kV on AC and DC power lines; 1kV on I/O and communications lines • <i>IEC 61000-4-6 Immunity to Conducted Disturbances induced by Radio-frequency Fields:</i> 3 V (rms) at 150 kHz to 80 MHz on I/O, V DC power and communication lines • <i>IEC 61000-4-8 Power Frequency Magnetic Field Immunity:</i> 30 A/m at 50 and 60 Hz

Regulatory Compliance, Product Safety	<ul style="list-style-type: none"> • <i>Underwriters Laboratories (UL) for U.S. and Canada:</i> UL/UL-C listed as suitable for use in Class I, Groups A-D; Division 2; temperature code T4 enclosure based systems. These modules are also UL and UL-C listed as associated apparatus for supplying non-incendive circuits for Class I, Groups A-D hazardous locations when connected to specified Foxboro DCS processor modules. Communications circuits also meet the requirements for Class 2 as defined in Article 725 of the National Electrical Code (NFPA No.70) and Section 16 of the Canadian Electrical Code (CSA C22.1). For more information, see <i>Standard and Compact 200 Series Subsystem User's Guide</i> (B0400FA). • <i>European Low Voltage Directive 2006/95/EC and Explosive Atmospheres (ATEX) directive 94/9/EC:</i> DEMKO certified for use in Zone 2 enclosures and certified as associated apparatus for supplying non-incendive field circuits for Zone 2, Group IIC, potentially explosive atmospheres when connected as described in the <i>Standard and Compact 200 Series Subsystem User's Guide</i> (B0400FA).
RoHS Compliance	Complies with European RoHS Directive 2011/65/EU, including amending Directives 2015/863 and 2017/2102

Environmental Specifications

	Operating	Storage
Temperature	-20 to +70°C (-4 to +158°F)	40 to +70°C (-40 to +158°F)
Relative Humidity	5 to 95% (noncondensing)	5 to 95% (noncondensing)
Altitude	-300 to +3,000 m (-1,000 to +10,000 ft)	-300 to +12,000 m (-1,000 to +40,000 ft)
Contamination	Suitable for use in Class G3 (Harsh) environments as defined in ISA Standard S71.04, based on exposure testing according to EIA Standard 364-65, Class III.	
Vibration	0.75 m/s ² (5 to 500 Hz)	

Physical Specifications

	FBM239	Termination Assembly
Mounting	<p>FBM239 mounts on a baseplate. The baseplate can be mounted on a DIN rail (horizontally or vertically), or horizontally on a 19-inch rack using a mounting kit. Alternatively, FBM239 mounts on a 100 Series conversion mounting structure.</p> <p>See <i>Standard 200 Series Baseplates</i> (PSS 41H-2SBASPLT) or <i>100 Series Conversion Mounting Structures</i> (PSS 41H-2W8) for details.</p>	<p>The TA mounts on a DIN rail and accommodates multiple DIN rail styles including 32 mm (1.26 in) and 35 mm (1.38 in)</p>
Weight	284 g (10 oz) approximate	<ul style="list-style-type: none"> Compression: 181 g (0.40 lb) approximate
Dimensions	<ul style="list-style-type: none"> Height: 102 mm (4 in), 114 mm (4.5 in) including mounting lugs Width: 45 mm (1.75 in) Depth: 104 mm (4.11 in) 	<ul style="list-style-type: none"> Compression Screw: See <i>Figure 1</i> and <i>Figure 2</i>
Part Numbers	<ul style="list-style-type: none"> FBM239 Module: RH927AG 	<p>See <i>Functional Specifications - Standard Termination Assemblies</i>, page 12, <i>Functional Specifications - Main Termination Assemblies</i>, page 13, and <i>Functional Specifications - Expansion Termination Assemblies</i>, page 18</p>
Termination Cables	<ul style="list-style-type: none"> Cable Lengths: Up to 30 m (98 ft) Cable Materials: Polyurethane or Low Smoke Zero Halogen Termination Cable Type: <ul style="list-style-type: none"> Baseplate to Main TA : Type 4 - See <i>Table 2</i>, page 23 Main TA to Expansion TA: Type 6 - See <i>Table 3</i>, page 24 	
Cable Connection — Baseplate to Main TA	<ul style="list-style-type: none"> FBM Baseplate End: 37-pin D-subminiature 	<ul style="list-style-type: none"> Termination Assembly End: 37-pin D-subminiature
Cable Connection — Main TA to Expansion TA	<ul style="list-style-type: none"> Main TA End: 25-pin D-subminiature 	<ul style="list-style-type: none"> Expansion TA End: 37-pin D-subminiature

Construction - Termination Assembly	<ul style="list-style-type: none">• Material: Polyamide (PA), compression
Field Termination Connections	Compression — Accepted Wiring Sizes: <ul style="list-style-type: none">• Solid/Stranded/AWG: 0.2 to 4 mm²/0.2 to 2.5 mm²/24 to 12 AWG• Stranded with Ferrules: 0.2 to 2.5 mm² with or without plastic collar

Termination Assemblies And Cables

Field I/O signals connect to the FBM subsystem via DIN rail mounted TAs. Multiple types of TAs are available with FBM239 to provide I/O signal connections, signal conditioning, optical isolation from signal surges, and external power connections for field devices as required by the particular FBM. Since these features are built into the TAs (where required), in most applications there is no need for additional termination equipment for field circuit functions such as circuit protection or signal conditioning (including fusing and power distribution).

The DIN rail mounted TAs connect to the FBM subsystem baseplate by means of removable termination cables. The cables are available in a variety of lengths, up to 30 meters (98 feet), allowing the TAs to be mounted in either the enclosure or in an adjacent enclosure. See *Table 2, page 23* and *Table 3, page 24* for termination cable part numbers and specifications.

Use of Termination Assemblies in 100 Series Upgrade

When an FBM239 is used to replace 100 Series FBMs, its associated termination assembly is determined based on which 100 Series FBM is being replaced. Typically, the 100 Series FBM being replaced is a main FBM and may be used in conjunction with an expansion FBM.

A single FBM239 provides the I/O communications for both the 100 Series equivalent main and expansion TAs. To provide enough terminals for the field I/O wiring, two termination assemblies are used with the FBM239 — one for the field I/O wiring for the replaced main FBM and one for the field I/O wiring for the replaced expansion FBM.

The “expansion” termination assembly is daisy-chained to the “main” termination assembly via the expansion cables listed in *Table 3, page 24*.

The table *Functional Specifications - Main Termination Assemblies, page 13* lists the termination assemblies needed to replace the 100 Series main FBMs. *Functional Specifications - Expansion Termination Assemblies, page 18* lists the termination assemblies needed to replace the 100 Series expansion FBMs.

Alternatively, the FBM239 can accept field wiring through a TAA instead of the termination assemblies when replacing 100 Series FBMs. This is discussed in *Termination Assembly Adapter Modules for 100 Series Upgrade (PSS 41H-2W4)*.

Discrete Inputs/Outputs

Various termination assemblies are available to support the interfacing of field signals to the low level FBM I/O circuits. Active termination assemblies support input/output signal conditioning for the FBM as well as channel isolation. The I/O signal conditioning circuits are designed to emulate the 100 Series FBM I/O subsystem. This provides for functional I/O equivalence during upgrades from 100 Series to 200 Series hardware. The signal conditioning circuits are located on daughter boards that are mounted under the component covers of the termination assemblies. To condition signals, these termination assemblies provide optical isolation, current limiting, voltage attenuation and optional terminal blocks to connect externally supplied excitation voltage.

Functional Specifications - Standard Termination Assemblies

FBM Type	Input Signal	Output Signal	TA Part No. ^(a)	Term. Type ^(b)	BP to TA Cable ^(c)	TA Cert. Type ^(d)
			PA			
FBM239	16 channel, Voltage Monitor, external source 30 V dc maximum applied voltage Logic Zero – 0 to 5 V dc Logic One – 15 to 30 V dc 2.2 mA typical at 30 V dc 1 kΩ Maximum On-state resistance 100 kΩ Minimum Off-state resistance	16 channel output switch, external source 60 V dc maximum voltage 0.25 A dc maximum current 2.0 A dc maximum current per FBM 0.25 mA dc maximum off-state leakage current 0.4 A over-current fuse	RH924VJ	C	4	1, 2, 4
FBM239	16 channel, Contact Sense, internal source 24 V dc nominal open circuit voltage 7 mA nominal maximum current 2.2 mA typical at 30 V dc 1 kΩ Maximum On-state resistance 100 kΩ Minimum Off-state resistance	16 channel output switch, external source 60 V dc maximum voltage 0.25 A dc maximum current 2.0 A dc maximum current per FBM 0.25 mA dc maximum off-state leakage current 0.4 A over-current fuse	RH924VM	C	4	1, 2, 4

(a) PA is polyamide rated from -20 to +70°C (-4 to +158°F).

(b) C = TA with compression terminals.

(c) See *Table 2, page 23* for cable part numbers and specifications.

(d) See *Table 1, page 23* Termination Assembly certification definitions.

Functional Specifications - Main Termination Assemblies

FBM Type	Input Signal	Output Signal	TA Part No. ^(a)	Term. Type ^(b)	BP to TA Cable ^(c)	TA Cert. Type ^(d)
			PA			
FBM239	<p>When replacing a main FBM09A/B:</p> <p>Voltage Monitor external source 130 V dc Maximum voltage</p> <p>Logic Zero – 0 to 5 V dc</p> <p>Logic One – 15 to 130 V dc</p> <p>2.2 mA typical 5 to 130 V dc</p> <p>1 kΩ Maximum On-state resistance</p> <p>100 kΩ Minimum Off-state resistance</p> <p>When replacing a main FBM09C/D:</p> <p>Contact sense internal source 24 V dc \pm10% Open circuit voltage</p> <p>2.5 mA maximum short circuit current</p> <p>1 kΩ Maximum On-state resistance</p> <p>100 kΩ Minimum Off-state resistance</p>	<p>When replacing a main FBM09A/C:</p> <p>Output Switch external source 60 V dc Maximum voltage</p> <p>0.5 V maximum voltage drop @ 0.5 A</p> <p>0.5 A maximum current</p> <p>0.75 A current limit Shorted load duration: indefinite (duty-cycle limited)</p> <p>1.0 mA maximum off-state leakage</p> <p>When replacing a main FBM09B/D:</p> <p>Output switch internal source 11 V dc \pm2 V Open circuit voltage</p> <p>Source resistance 680 Ω nominal</p> <p>Shorted load duration: indefinite</p> <p>0.5 mA maximum off-state leakage</p>	RH924HE	C	4	1, 2, 4

FBM Type	Input Signal	Output Signal	TA Part No. ^(a)	Term. Type ^(b)	BP to TA Cable ^(c)	TA Cert. Type ^(d)
			PA			
FBM239	<p>When replacing a main FBM10:</p> <p>Voltage Monitor external source 132 V ac Maximum voltage</p> <p>Logic Zero – 0 to 20 V ac Logic One: 79 to 132 V ac 2.2 mA typical 20 to 132 V ac 1 kΩ Maximum On-state resistance 100 kΩ Minimum Off-state resistance</p>	<p>When replacing a main FBM10:</p> <p>Output Switch external source 132 V ac Maximum voltage</p> <p>0.4 V maximum voltage drop @ 1 A</p> <p>2 A maximum current per channel 12 A maximum current per TA 3 A current limit 24 A surge current limit for 10 msec</p> <p>Shorted load duration: indefinite (duty-cycle limited) 3 mA maximum off-state leakage</p>	RH924HG	C	4	1, 4
FBM239	<p>When replacing a main FBM11:</p> <p>Voltage Monitor external source 264 V ac Maximum voltage</p> <p>Logic Zero – 0 to 40 V ac Logic One: 164 to 264 V ac 2.2 mA typical 40 to 264 V ac 1 kΩ Maximum On-state resistance 100 kΩ Minimum Off-state resistance</p>	<p>When replacing a main FBM11:</p> <p>Output Switch external source 264 V ac Maximum voltage</p> <p>0.6 V maximum voltage drop @ 0.5 A</p> <p>1 A maximum current per channel 7 A maximum current per TA 1.5 A current limit 12 A surge current limit for 10 ms</p> <p>Shorted load duration: indefinite (duty-cycle limited) 2.5 mA maximum off-state leakage</p>	RH924HJ	C	4	1

FBM Type	Input Signal	Output Signal	TA Part No. ^(a)	Term. Type ^(b)	BP to TA Cable ^(c)	TA Cert. Type ^(d)
			PA			
FBM239	<p>When replacing a main FBM26A:</p> <p>Voltage Monitor external source 150 V dc Maximum voltage</p> <p>Logic Zero – 0 to 10 V dc Logic One: 33 to 150 V dc 2.5 mA typical 10 to 150 V dc</p> <p>1 kΩ Maximum On-state resistance 100 kΩ Minimum Off-state resistance</p>	<p>When replacing a main FBM26A:</p> <p>Output Switch external source 150 V dc Maximum voltage</p> <p>0.4 V maximum voltage drop @ 1 A</p> <p>2 A maximum current per channel 12 A maximum current per TA 2.3 A current limit 20 A surge current limit for 20 ms</p> <p>Shorted load duration: indefinite (duty-cycle limited) 2 mA maximum off-state leakage</p>	RH924HU	C	4	1, 2, 4
FBM239	<p>When replacing a main FBM26B:</p> <p>Contact sense internal source 48 V dc nominal Open circuit voltage 2.5 mA \pm20% short circuit current</p> <p>1 kΩ Maximum On-state resistance 100 kΩ Minimum Off-state resistance</p>	<p>When replacing a main FBM26B:</p> <p>Output switch external source 150 V dc Maximum voltage</p> <p>0.4 V maximum voltage drop @ 1 A</p> <p>2 A maximum current per channel 12 A maximum current per TA 2.3 A current limit 20 A surge current limit for 20 ms</p> <p>Shorted load duration: indefinite 2 mA maximum off-state leakage</p>	RH924HV	C	4	1, 2, 4

FBM Type	Input Signal	Output Signal	TA Part No. ^(a)	Term. Type ^(b)	BP to TA Cable ^(c)	TA Cert. Type ^(d)
			PA			
FBM239	When replacing a main FBM26C: Contact sense external source on channel 1 150 V dc Maximum voltage Logic Zero – 0 to 10 V dc Logic One: 33 to 150 V dc 2.5 mA typical 10 to 150 V dc 1 kΩ Maximum On-state resistance 100 kΩ Minimum Off-state resistance	When replacing a main FBM26C: Output switch external source 150 V dc Maximum voltage 0.4 V maximum voltage drop @ 1 A 2 A maximum current per channel 12 A maximum current per TA 2.3 A current limit 20 A surge current limit for 20 ms Shorted load duration: indefinite 2 mA maximum off-state leakage	RH924H-W	C	4	1, 2, 4

FBM Type	Input Signal	Output Signal	TA Part No. ^(a)	Term. Type ^(b)	BP to TA Cable ^(c)	TA Cert. Type ^(d)
			PA			
FBM239	<p>When replacing a main FBM41A:</p> <p>Voltage Monitor external source 60 V dc Maximum voltage</p> <p>Logic Zero – 0 to 5 V dc</p> <p>Logic One – 15 to 60 V dc</p> <p>6 mA maximum input current</p> <p>1 kΩ Maximum On-state resistance</p> <p>100 kΩ Minimum Off-state resistance</p> <p>When replacing a main FBM41C:</p> <p>Contact sense internal source 24 V dc ±20% Open circuit voltage</p> <p>5 mA maximum short circuit current</p> <p>1 kΩ Maximum On-state resistance</p> <p>100 kΩ Minimum Off-state resistance</p>	<p>When replacing a main FBM41A/C:</p> <p>Output Switch external source 60 V dc Maximum voltage</p> <p>0.4 V maximum voltage drop @ 1 A</p> <p>2.25 A maximum current</p> <p>12 A maximum current per TA</p> <p>10 A surge current limit for 20 ms maximum</p> <p>Shorted load duration: indefinite (duty-cycle limited)</p> <p>0.5 mA maximum off-state leakage</p>	RH924JA	C	4	1, 2, 4

(a) PA is polyamide rated from -20 to +70°C (-4 to +158°F).

(b) C = TA with compression terminals.

(c) See *Table 2, page 23* for cable part numbers and specifications.

(d) See *Table 1, page 23* Termination Assembly certification definitions.

Functional Specifications - Expansion Termination Assemblies

FBM Type	Input Signal	Output Signal	TA Part No. ^(a)	Term. Type ^(b)	BP to TA Cable ^(c)	TA Cert. Type ^(d)
			PA			
FBM239	<p>When replacing an expansion FBM14A/B:</p> <p>Voltage Monitor external source 130 V dc maximum voltage</p> <p>Logic Zero – 0 to 5 V dc</p> <p>Logic One – 15 to 130 V dc</p> <p>2.2 mA typical 5 to 130 V dc</p> <p>1 kΩ Maximum On-state resistance</p> <p>100 kΩ Minimum Off-state resistance</p> <p>When replacing an expansion FBM14C/D:</p> <p>Contact sense internal source 24 V dc \pm10% Open circuit voltage</p> <p>2.5 mA maximum short circuit current</p> <p>1 kΩ Maximum On-state resistance</p> <p>100 kΩ Minimum Off-state resistance</p>	<p>When replacing an expansion FBM14A/C:</p> <p>Output Switch external source 60 V dc maximum voltage</p> <p>0.5 V maximum voltage drop @ 0.5 A</p> <p>0.5 A maximum current</p> <p>0.75 A current limit</p> <p>Shorted load duration: indefinite (duty-cycle limited)</p> <p>1.0 mA maximum off-state leakage</p> <p>When replacing an expansion FBM14B/D:</p> <p>Output switch internal source 11 V dc \pm2 V Open circuit voltage</p> <p>Source resistance 680 Ω nominal</p> <p>Shorted load duration: indefinite</p> <p>0.5 mA maximum off-state leakage</p>	RH924HF	C	6	1, 2, 4

FBM Type	Input Signal	Output Signal	TA Part No. ^(a)	Term. Type ^(b)	BP to TA Cable ^(c)	TA Cert. Type ^(d)
			PA			
FBM239	<p>When replacing an expansion FBM15:</p> <p>Voltage Monitor external source 132 V ac maximum voltage</p> <p>Logic Zero – 0 to 20 V ac</p> <p>Logic One: 79 to 132 V ac</p> <p>2.2 mA typical 20 to 132 V ac</p> <p>1 kΩ Maximum On-state resistance</p> <p>100 kΩ Minimum Off-state resistance</p>	<p>When replacing an expansion FBM15:</p> <p>Output Switch external source 132 V ac maximum voltage</p> <p>0.4 V maximum voltage drop @ 1 A</p> <p>2 A maximum current per channel</p> <p>12 A maximum current per TA</p> <p>3 A current limit</p> <p>24 A surge current limit for 10 ms</p> <p>Shorted load duration: indefinite (duty-cycle limited)</p> <p>3 mA maximum off-state leakage</p>	RH924HH	C	6	1, 4
FBM239	<p>When replacing an expansion FBM16:</p> <p>Voltage Monitor external source 264 V ac Maximum voltage</p> <p>Logic Zero – 0 to 40 V ac</p> <p>Logic One: 164 to 264 V ac</p> <p>2.2 mA typical 40 to 264 V ac</p> <p>1 kΩ Maximum On-state resistance</p> <p>100 kΩ Minimum Off-state resistance</p>	<p>When replacing an expansion FBM16:</p> <p>Output Switch external source 264 V ac Maximum voltage</p> <p>0.6 V maximum voltage drop @ 0.5 A</p> <p>1 A maximum current per channel</p> <p>7 A maximum current per TA</p> <p>1.5 A current limit</p> <p>12 A surge current limit for 10 ms</p> <p>Shorted load duration: indefinite (duty-cycle limited)</p> <p>2.5 mA maximum off-state leakage</p>	RH924HK	C	6	1

FBM Type	Input Signal	Output Signal	TA Part No. ^(a)	Term. Type ^(b)	BP to TA Cable ^(c)	TA Cert. Type ^(d)
			PA			
FBM239	<p>When replacing an expansion FBM27A:</p> <p>Voltage Monitor external source 150 V dc Maximum voltage</p> <p>Logic Zero – 0 to 10 V dc</p> <p>Logic One: 33 to 150 V dc</p> <p>2.5 mA typical 10 to 150 V dc</p> <p>1 kΩ Maximum On-state resistance</p> <p>100 kΩ Minimum Off-state resistance</p>	<p>When replacing an expansion FBM27A:</p> <p>Output Switch external source 150 V dc Maximum voltage</p> <p>0.4 V maximum voltage drop @ 1 A</p> <p>2 A maximum current per channel</p> <p>12 A maximum current per TA</p> <p>2.3 A current limit</p> <p>20 A surge current limit for 20 ms</p> <p>Shorted load duration: indefinite (duty-cycle limited)</p> <p>2 mA maximum off-state leakage</p>	RH924HX	C	6	1, 2, 4
FBM239	<p>When replacing an expansion FBM27B:</p> <p>Contact sense internal source 48 V dc nominal</p> <p>Open circuit voltage 2.5 mA ±20% short circuit current</p> <p>1 kΩ Maximum On-state resistance</p> <p>100 kΩ Minimum Off-state resistance</p>	<p>When replacing an expansion FBM27A:</p> <p>Output switch external source 150 V dc Maximum voltage</p> <p>0.4 V maximum voltage drop @ 1 A</p> <p>2 A maximum current per channel</p> <p>12 A maximum current per TA</p> <p>2.3 A current limit</p> <p>20 A surge current limit for 20 ms</p> <p>Shorted load duration: indefinite</p> <p>2 mA maximum off-state leakage</p>	RH924HY	C	6	1, 2, 4

FBM Type	Input Signal	Output Signal	TA Part No. ^(a)	Term. Type ^(b)	BP to TA Cable ^(c)	TA Cert. Type ^(d)
			PA			
FBM239	When replacing an expansion FBM27C: Contact sense external source on channel 1 150 V dc Maximum voltage Logic Zero – 0 to 10 V dc Logic One: 33 to 150 V dc 2.5 mA typical 10 to 150 V dc 1 kΩ Maximum On-state resistance 100 kΩ Minimum Off-state resistance	When replacing an expansion FBM27A: Output switch external source 150 V dc Maximum voltage 0.4 V maximum voltage drop @ 1 A 2 A maximum current per channel 12 A maximum current per TA 2.3 A current limit 20 A surge current limit for 20 ms Shorted load duration: indefinite 2 mA maximum off-state leakage	RH924HZ	C	6	1, 2, 4

FBM Type	Input Signal	Output Signal	TA Part No. ^(a)	Term. Type ^(b)	BP to TA Cable ^(c)	TA Cert. Type ^(d)
			PA			
FBM239	When replacing an expansion FBM42A: Voltage Monitor external source 60 V dc Maximum voltage Logic Zero – 0 to 5 V dc Logic One – 15 to 60 V dc 6 mA maximum input current 1 kΩ Maximum On-state resistance 100 kΩ Minimum Off-state resistance When replacing an expansion FBM42C: Contact sense internal source 24 V dc ±20% Open circuit voltage 5 mA maximum short circuit current 1 kΩ Maximum On-state resistance 100 kΩ Minimum Off-state resistance	When replacing an expansion FBM42A/C: Output Switch external source 60 V dc Maximum voltage 0.4 V maximum voltage drop @ 1 A 2.25 A maximum current 12 A maximum current per TA 10 A surge current limit for 20 ms maximum Shorted load duration: indefinite (duty-cycle limited) 1.0 mA maximum off-state leakage	RH924JB	C	6	1, 2, 4

Connect this TA to the main TA

- (a) PA is polyamide rated from -20 to +70°C (-4 to +158°F).
- (b) C = TA with compression terminals.
- (c) See *Table 2, page 23* for cable part numbers and specifications.
- (d) See *Table 1, page 23* Termination Assembly certification definitions.

Table 1 - Certifications for Termination Assemblies

Type	Certification
Type 1	TAs are UL/UL-C listed as suitable for use in Class I; Groups A-D; Division 2 temperature code T4 hazardous locations. They are DEMKO certified EEx nA IIC T4 for use in Zone 2 potentially explosive atmospheres.
Type 2	TAs are UL/UL-C listed as associated apparatus for supplying non-incendive field circuits Class I; Groups A-D; Division 2 hazardous locations when connected to specified 200 Series FBMs and field circuits meeting entity parameter constraints specified in <i>Standard and Compact 200 Series Subsystem User's Guide</i> (B0400FA). They are also DEMKO certified as associated apparatus for supplying field circuits for Group IIC, Zone 2 potentially explosive atmospheres. Field circuits are also Class 2 limited energy (60 V dc, 30 V ac, 100 VA or less) if customer-supplied equipment meets Class 2
Type 3	Same as Type 2 above except that only input circuits are non-incendive/Class 2.
Type 5	All field circuits are NEC/CEC Class 2 limited energy if customer-supplied equipment meets Class 2 limits.


Table 2 - Termination Cable Types (Baseplate to Main TA) and Part Numbers - Type 4

Cable Length m (ft)	Type 4 P/PVC ^(a)	Type 4 LSZH ^(b)
0.5 (1.6)	RH916FG	RH928BA
1.0 (3.2)	RH916FH	RH928BB
2.0 (6.6)	RH931RQ	RH928BC
3.0 (9.8)	RH916FJ	RH928BD
5.0 (16.4)	RH916FK	RH928BE
10.0 (32.8)	RH916FL	RH928BF
15.0 (49.2)	RH916FM	RH928BG
20.0 (65.6)	RH916FN	RH928BH
25.0 (82.0)	RH916FP	RH928BJ
30.0 (98.4)	RH916FQ	RH928BK
<p>^(a) P/PVC is polyurethane outer jacket and semi-rigid PVC primary conductor insulation. PVC is rated from -20 to +80°C (-4 to 176°F).</p> <p>^(b) Low smoke zero halogen or low smoke free of halogen (LSZH) is a material classification used for cable jacketing. LSZH is composed of thermoplastic or thermoset compounds that emit limited smoke and no halogen when exposed to high sources of heat. Temperature range: -40 to +105°C (-40 to +221°F)</p>		

Table 3 - Cable Types (Main TA to Expansion TA Cables) and Part Numbers

Cable Length m (ft)	Type 6 P/PVC^(a)	Type 6 LSZH^(b)
0.75 (2.5)	RH924CK	RH928CQ
<p>^(a) LP/PVC is polyurethane outer jacket and semi-rigid PVC primary conductor insulation. PVC is rated from -20 to +80°C (-4 to 176°F).</p> <p>^(b) Low smoke zero halogen or low smoke free of halogen (LSZH) is a material classification used for cable jacketing. LSZH is composed of thermoplastic or thermoset compounds that emit limited smoke and no halogen when exposed to high sources of heat. Temperature range: -40 to +105°C (-40 to +221°F).</p>		

Dimensions - Nominal

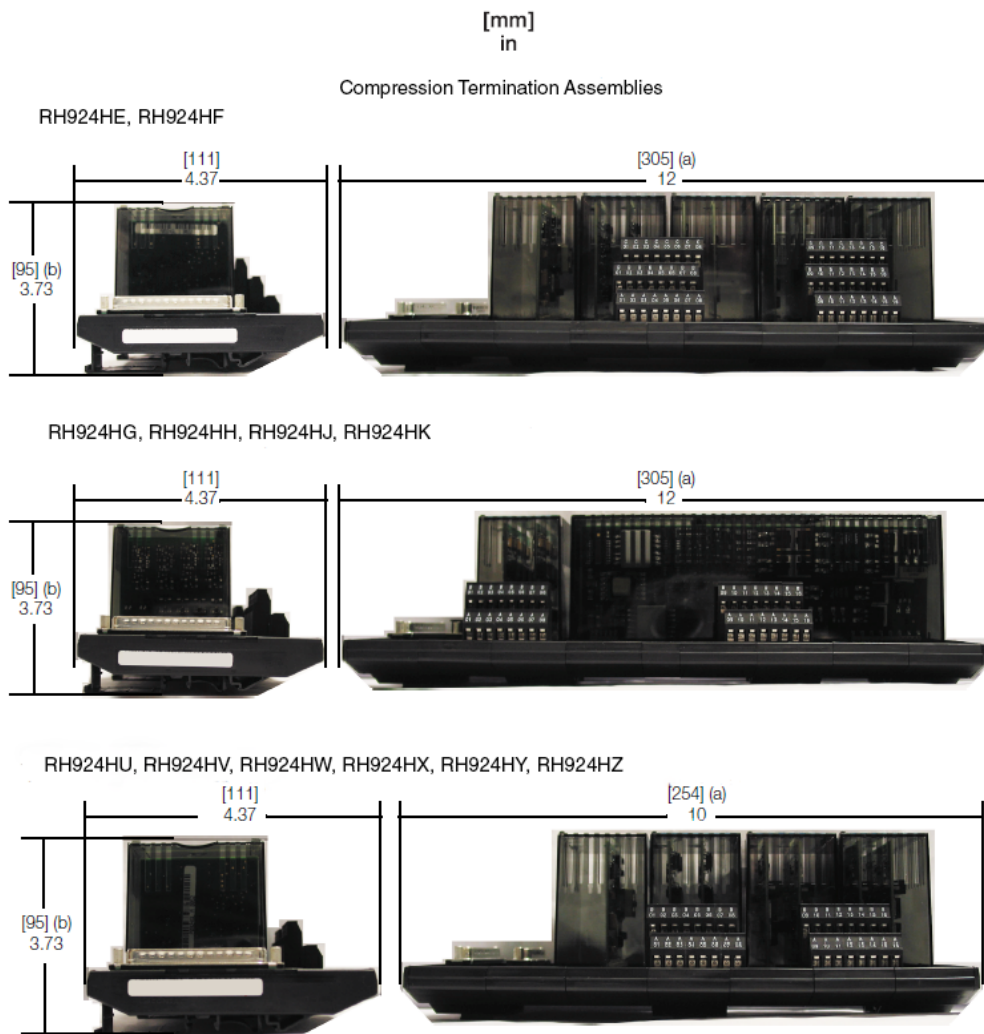


(a) Overall width – for determining DIN rail loading.

(b) Height above DIN rail (add to DIN rail height for total)


[mm]
in

Compression Termination Assemblies

RH924JA, RH924JB

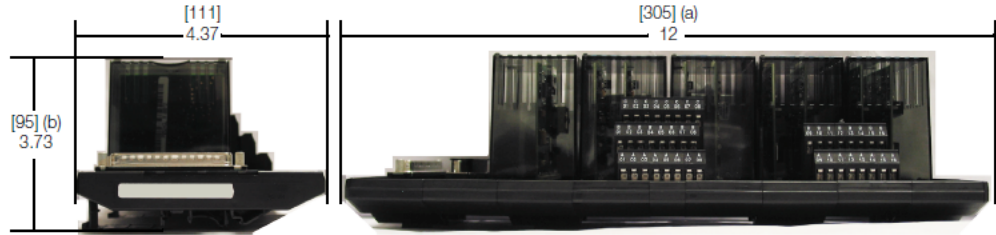

RH924VJ, RH924VM

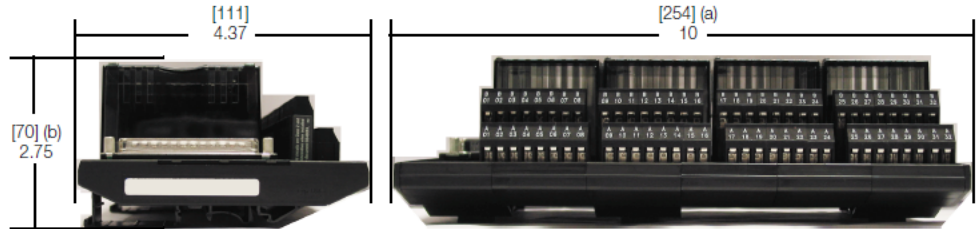

(a) Overall width – for determining DIN rail loading.

(b) Height above DIN rail (add to DIN rail height for total)

Related Product Documents

Document Number	Description
PSS 41H-2SOV	<i>Standard 200 Series Subsystem Overview</i>
PSS 41H-2W100	<i>100 Series Fieldbus Module Upgrade Subsystem Overview</i>
PSS 41H-2CERTS	<i>Standard and Compact 200 Series I/O - Agency Certifications</i>
PSS 41H-2W4	<i>Termination Assembly Adapter Modules for 100 Series Upgrade</i>
PSS 41H-2SBASPLT	<i>Standard 200 Series Baseplates</i>
PSS 41H-2W8	<i>100 Series Conversion Mounting Structures</i>
PSS 41S-3FCPICS	<i>Field Control Processor 280 (FCP280) Integrated Control Software</i>
B0400FA	<i>Standard and Compact 200 Series Subsystem User's Guide</i>

Schneider Electric Systems USA, Inc.
38 Neponset Avenue
Foxboro, Massachusetts 02035-2037
United States of America

Global Customer Support: <https://pasupport.schneider-electric.com>

As standards, specifications, and design change from time to time,
please ask for confirmation of the information given in this publication.

© 2019 Schneider Electric. All rights reserved.

PSS 41H-2S239, Rev A